




NEW SUNSHINE LIGHTING INC

THE FIRST MANUFACTURER OF LED CORN BULBS

Distributor

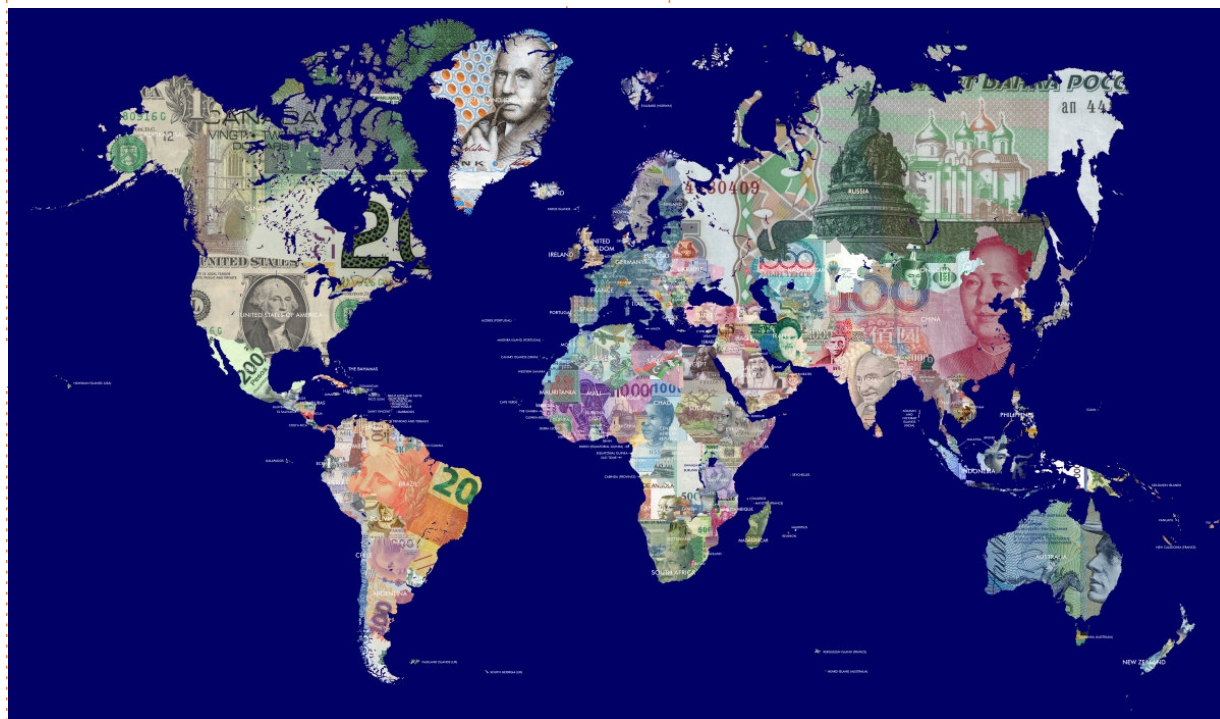

NEWSUNSHINE

CONTENTS

New Sunshine Lighting Inc. base in Los Angeles of USA. Our R&D is base in Shenzhen and factory is in Dongguan of China. Our products cover LED corn bulbs, E26/27 & E39/40 base retrofit kits, smart LED lighting, commercial lighting, they are widely use in the fixtures like shoebox, cobra, packing lot, wall pack, canopy & garage lighting etc.

All products comply with the requirements of ISO 9001:2008, passed European certificates of CE, ROHS, TUV and ENEC, also American certificates of UL, ETL & DLC.

New Sunshine lighting becomes the first LED corn bulbs manufacturer. We have all patents in mainland China, EU, the United States. As company's registered trademark, 'NS' enjoyed high reputation in led fields, and especially favored American customers.

We always uphold the "Faithfulness, mutual benefit", "Business philosophy, passion innovation" and "Pragmatic progressive, development attitude", marching towards the ambition of "becoming the LED leading enterprises around the world"!

New Sunshine Lighting Inc.
+1 201 969 5019 / +1 323 616 7060
www.nssled.com

Email: order@newsunshine.net
robert@nssled.com



Temporary work Light Series



Connectable Up to 6 Units



Features Description

1. 360-degree luminescence, adopt efficient ADC12 die-cast aluminum plus surface treatment to accelerate heat dissipation.
2. Wide pressure isolating constant current power supply, Adopt 2.4G remote control, 360-degree omni-directional operation, remote control distance.
3. Portable hooks are convenient, flexible and easy to operate.
4. Provide socket connector, which can connect 6 lamps in series at the same time.
5. Suitable for outdoor wet or humid places. IP65 waterproof rating.
6. The luminaire can be controlled by the remote control. One remote control can match 6 illuminators at the same time, and the remote control distance is up to 30 meters.



Parameter

Power: 80W~100W available
 Voltage: AC100-277V
 Base Type: Pothook
 IP rate: **IP 65**
 CRI > 80

Applications

- ☉ High bay
- ☉ Jobsite



Model	Power	Base	Lumens	Dim	N.W	CTN size	CTN quantity	CTN weight	 
NS-TWL60W-01-T	60W	Pothook	8400LM	φ141*156 mm φ5.5*6.1 in	1.1Kg	φ525*455*470 mm φ20.67*17.91*18.50 in	12 pcs	15.5Kg	Y Y



Temporary work Light Series

Model	Packaging unit (Pieces/Unit)	Dimensions	Gross weight	Volume
NS-TWL60W-01-T	Small box 1	22*17*22cm	1.2Kg	0.008m ³
	Outer Carton 12	52.5*45.5*47cm	15.5Kg	0.11m ³

Package

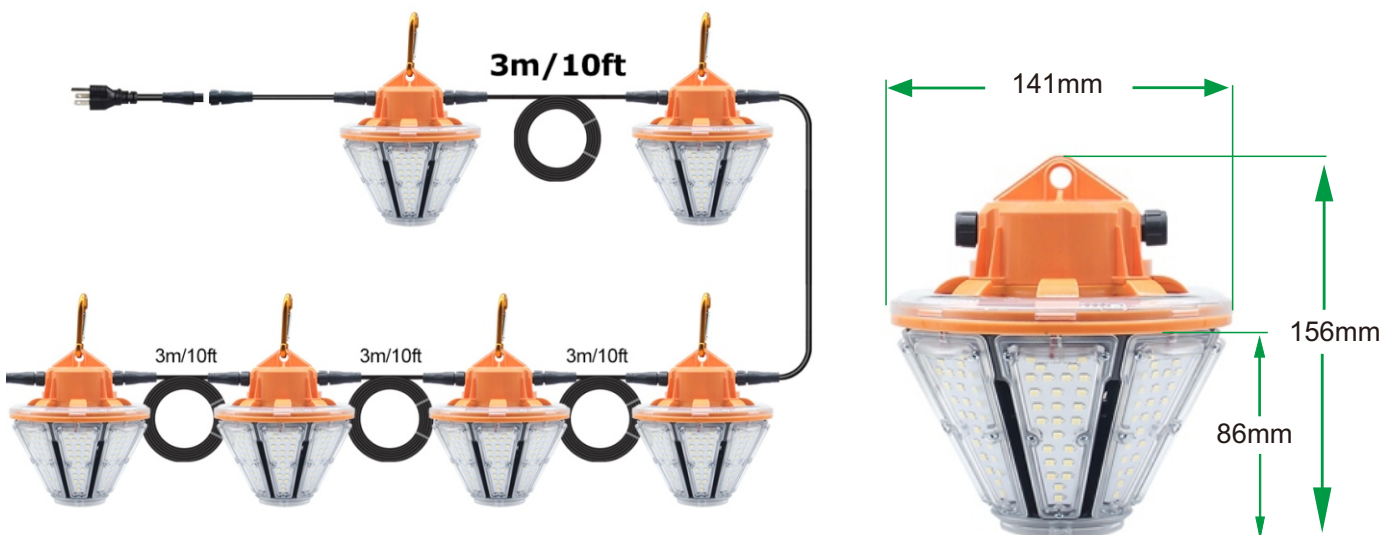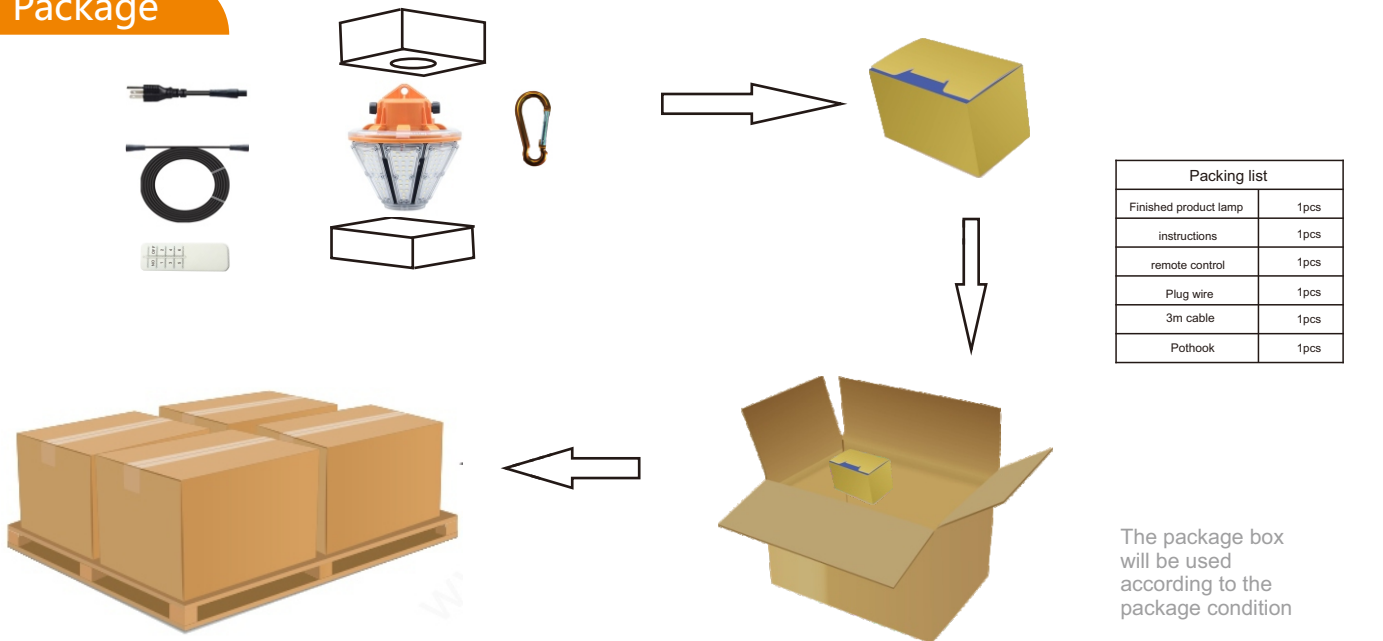



Temporary work Light Series

IP65



Features

80W-100W No fan Design, die-casting aluminum heat sinker to speed up heat dissipation.


Isolated constant current power supply. 6000V Surge Protection, Lamp can bear sudden high voltage.

-11.5ft power cord (80w & 100w) , 17ft power cord (120w / 150w)

Offer connector to make lamp connect in series like string lights, it can connect with 8~10 pcs lamps in the meanwhile.

This can be used as high bay, Spotlight. Stainless steel guard for impact protection. **Can work in outdoor rainy day, wet location.**

Stainless hooks, easy to hang up.

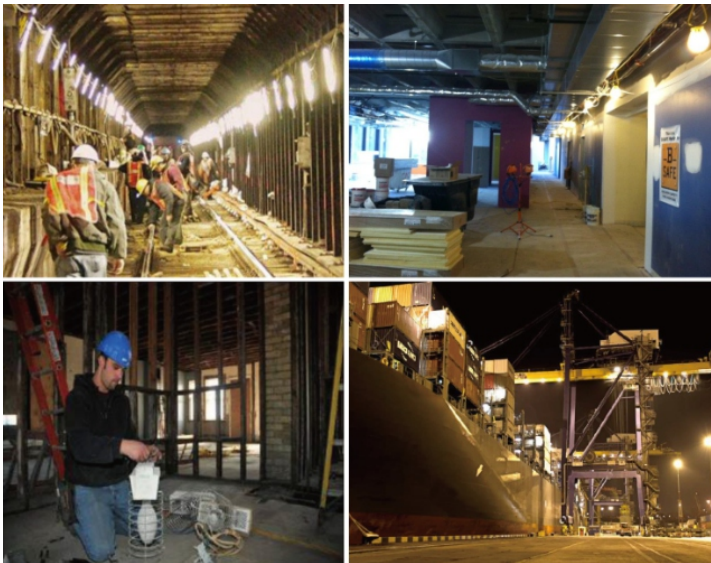

Parameter

Power: 80w~100w available

Voltage: AC100-277V


Base Type: Pothook

IP rate: **IP 65**

CRI>80

Applications

- ⊙ High bay
- ⊙ Jobsite


Model	Power	Base	Lumens	Dim	N.W	CTN size	CTN quantity	CTN weight		
NS-TWL80W-01-T	80W	Pothook	10000LM	φ195*273 mm φ7.68*10.75 in	2.4 Kg 5.29 lb	325*495*510 mm 12.80*19.49*20.08 in	4pcs	12.5kg	Y	Y
NS-TWL100W-01-T	100W	Pothook	12500LM	φ195*273 mm φ7.68*10.75 in	2.4 Kg 5.29 lb	325*495*510 mm 12.80*19.49*20.08 in	4pcs	12.5kg	Y	Y
NS-TWL120W-01-T	120W	Pothook	15000LM	φ195*273 mm φ7.68*10.75 in	2.4 Kg 5.29 lb	325*495*510 mm 12.80*19.49*20.08 in	4pcs	12.5kg	Y	Y
NS-TWL150W-01-T	150W	Pothook	18750LM	φ195*273 mm φ7.68*10.75 in	2.4 Kg 5.29 lb	325*495*510 mm 12.80*19.49*20.08 in	4pcs	12.5kg	Y	Y



Temporary work Light Series

Packaging unit (Pieces/Unit)	Dimensions	Gross weight
Small box 1	12.20*9.45*9.65in	2.4Kg
Outer Carton 4	12.80*19.49*20.08in	12.5Kg

Package

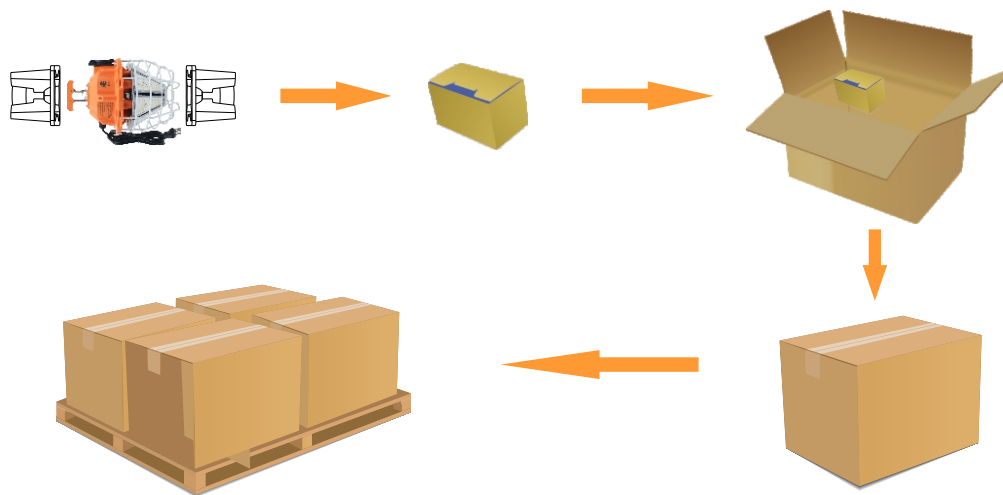

The package box will be used according to the package condition




LED Corn lamp



HPS / HID / MH

80W	=	250W
100W	=	300W
120W	=	360W
150W	=	450W

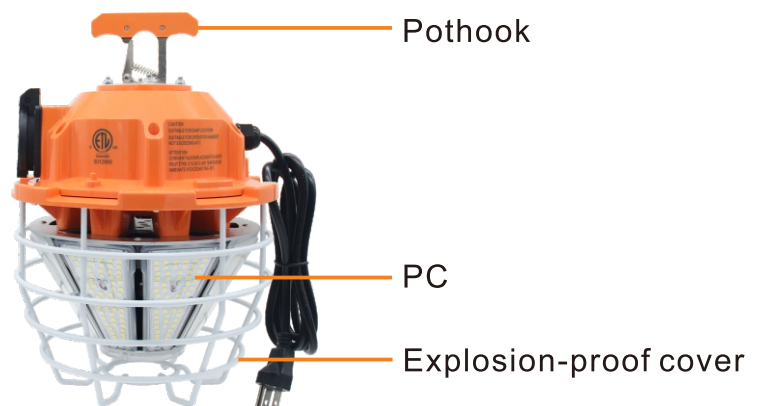

Material



Temporary work Light Series

Ip64



Features

No fan Design, die-casting aluminum heat sinker to speed up heat dissipation.

Isolated constant current power supply. 6000V Surge Protection, Lamp can bear sudden high voltage.

-11.5ft power cord (80w & 100w) , 17ft power cord (120w / 150w)

Offer connector to make lamp connect in series like string lights, it can connect with 8~10 pcs lamps in the meanwhile.

This can be used as high bay, Spotlight. Stainless steel guard for impact protection. **Can work in outdoor damp or wet location.**

Stainless hooks, easy to hang up.



Parameter

Power: 80w~150w available

Voltage: AC100-277V



Base Type: Pothook

IP rate: IP 64

CRI > 80

Applications

- ⊙ High bay
- ⊙ Jobsite


Model	Power	Base	Lumens	Dim	N.W	CTN size	CTN quantity	CTN weight	 
NS-TWL80W-01-C	80W	Pothook	10000LM	φ170*332 mm φ6.70*13.07 in	2.2 Kg 4.85 lb	385*445*460 mm 15.16*17.52*18.11 in	4pcs	12kg	Y N
NS-TWL100W-01-C	100W	Pothook	12500LM	φ170*332 mm φ6.70*13.07 in	2.2 Kg 4.85 lb	385*445*460 mm 15.16*17.52*18.11 in	4pcs	12kg	Y N
NS-TWL120W-01-C	120W	Pothook	15000LM	φ170*390 mm φ6.70*15.35 in	2.4 Kg 5.29 lb	440*445*460 mm 17.32*17.52*18.11 in	4pcs	12.5kg	Y Y
NS-TWL150W-01-C	150W	Pothook	18750LM	φ170*390 mm φ6.70*15.35 in	2.4 Kg 5.29 lb	440*445*460 mm 17.32*17.52*18.11 in	4pcs	12.5kg	Y Y





Temporary work Light Series


Model	Packaging unit (Pieces/Unit)	Dimensions	Gross weight
NS-TWL80W-01-C	Small box 1	37*21.5*22cm	2.2Kg
NS-TWL100W-01-C	Outer Carton 4	38.5*44.5*46cm	12Kg
NS-TWL120W-01-C	Small box 1	42.5*21.5*22cm	2.4Kg
NS-TWL150W-01-C	Outer Carton 4	44*44.5*46cm	12.5Kg

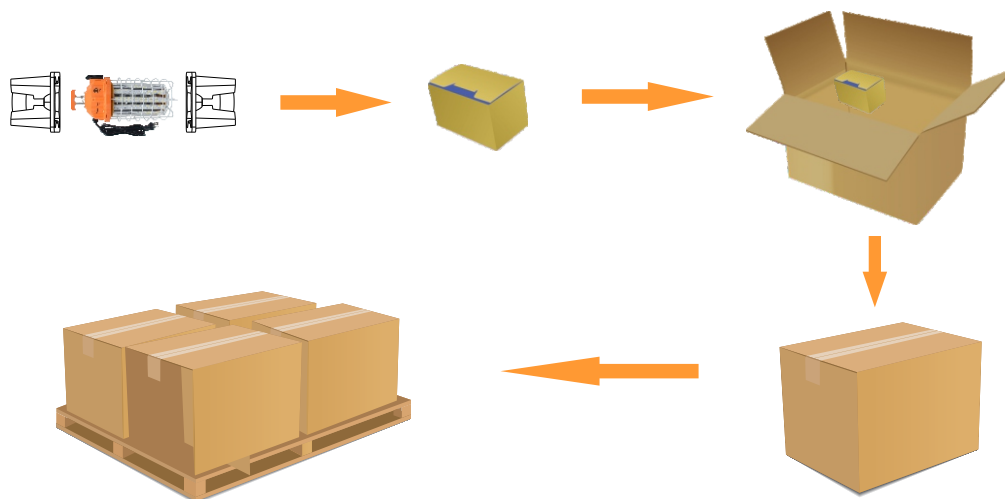Package



The package box will be used according to the package condition

		
LED Corn lamp		HPS/HID/MH
80W	=	250W
100W		300W
120W		360W
150W		450W

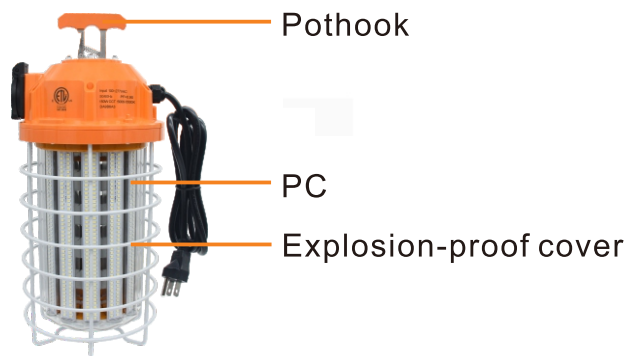

Material



Temporary work Light Series

Waterproof



Features

T style: 360-degree luminescence, adopt efficient ADC12 die-cast aluminum plus surface treatment to accelerate heat dissipation.

*C style: 360 degree luminescence, **no fan design**. high conduction and portable stamping aluminum to accelerate heat dissipation.*

Wide pressure isolating constant current power supply, anti-surge protection of 6000V. The lamp can withstand sudden high voltage.

*Provide socket connector, which **can connect 8 lamps** in series at the same time.*

It can be used as HIGH BAY with spotlights and stainless steel protective cover.

Suitable for outdoor wet or humid places. IP64 waterproof rating.

Stainless steel hooks are more convenient to use.

*The luminaire can be controlled by the remote control. One remote control can match 8 illuminators at the same time, and the remote control distance is up to **30 meters**.*

Parameter

Power: 80w~150w available

Voltage: AC100-277V

Base Type: Pothook

IP rate: IP 64

CRI>80

Applications

- ⦿ *High bay*
- ⦿ *Jobsite*


Model	Power	Base	Lumens	Dim	N.W	CTN size	CTN quantity	CTN weight
NS-TWL150W-02-T	150W	Pothook	18750LM	φ195*273 mm φ7.68*10.75 in	2.4 Kg 4.29 lb	325*495*510 mm 12.80*19.49*20.08 in	4pcs	12.5kg
NS-TWL150W-02-C	150W	Pothook	18750LM	φ170*390 mm φ6.70*15.35 in	2.4 Kg 5.29 lb	440*445*460 mm 17.32*17.52*18.11 in	4pcs	12.5kg



Temporary work Light Series

Model	Packaging unit (Pieces/Unit)	Dimensions	Gross weight
NS-TWL150W-02-T	Small box 1	30.0*24.0*24.5cm	2.4Kg
	Outer Carton 4	32.5*49.5*51.0cm	12.5Kg
NS-TWL150W-01-C	Small box 1	42.5*21.5*22cm	2.4Kg
	Outer Carton 4	44*44.5*46cm	12.5Kg

Remote control: Can control 8 light

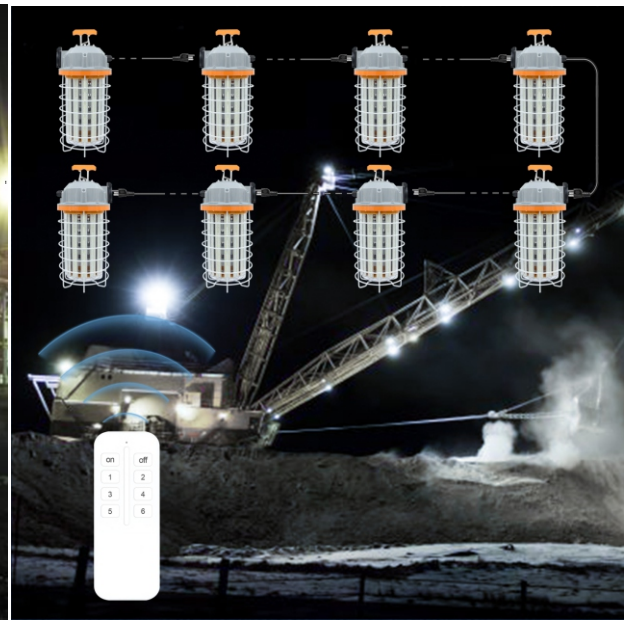


150W

=



450W

FACTORY

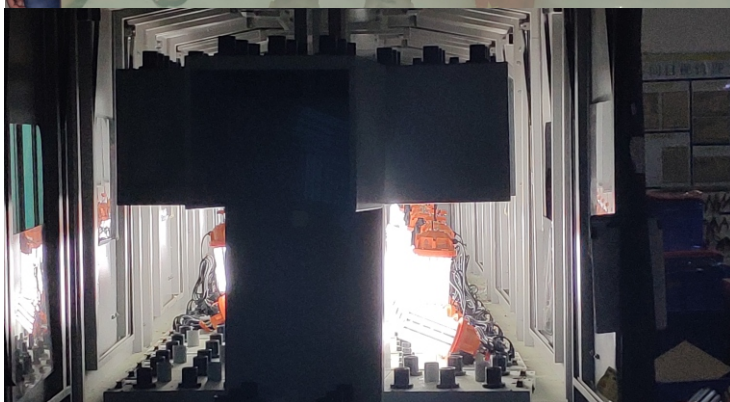

CEO-Robert Qin



New Sunshine Lighting Inc.

US Warehouse:
15344a Valley Blvd City of Industry CA 91746
+1 201 969 5019
+1 323 616 7060

Chinese factory:
4/F, Block D, 128 industrial zone, Zhenxingwei Area, Tangxia, Dongguan, Guangdong Province, P.R. China
+86-769-88004885
+86-13826588764