

Product datasheet

NS-WLC100W-01

LED Corn light



General illumination

Outdoor use in outdoor luminaires only (minimum Ip65)


Reduces lumen maintain flux and working life if used in sealed lamp fixtures. ①

Product features


- Unique structure design , removable power supply and light source (easier for power supply and light source replacement if needed).
- Aluminum fin-shape heat sinking and active air exchanging cooling system in order to speed up heat dissipation.
- No UV and near-IR radiation in the light beam.
- Very low energy consumption, Lower thermal output.
- Popular, ballast free, easy installation.
- Not suitable for dimmers ,electronic switches and remote controls .
- Can be easily fitted instead of ordinary light bulbs.
- Mainly used in work places, supermarkets and public lighting.

Applications

Factory

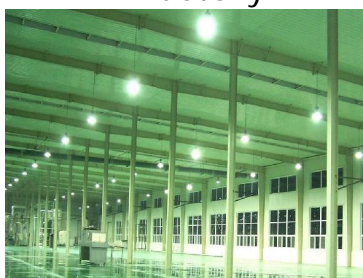

office

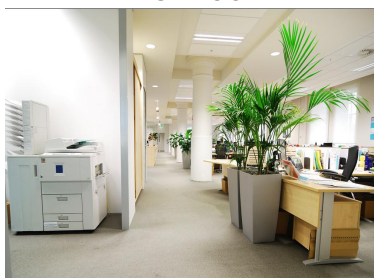

supermarket



Product datasheet

Technical data

Electrical data


Rated wattage	100-108W
Input Voltage	100-277V AC
Operating frequency	50/60 Hz
Rated power factor	>0.90
Power Efficiency	>0.87
Humidity	< 90%
Ambient temperature	-40 ~ 45°C
Base (standard designation)	E39/E40
Replacement conventional lamp power	400W CFL/HID
Output Short Circuit Protection	YES
Output Overvoltage protection	YES
Dimmable	NO

Light technical data

Light Source/Count	420pcs 0.5W 2835 SMD LED
Luminous flux	15000±5%LM
Color temperature	Warm White: 2,700 ~ 3,500 K Natural White: 4,000 ~ 5,000 K Cool White: 5,500 ~ 6,700K
Color rendering index Ra	Ra > 80
Starting time	0 S
LED Emitter Life	50000hrs
Lifepan of LED Lamp	35000hrs




Dimensions & weight

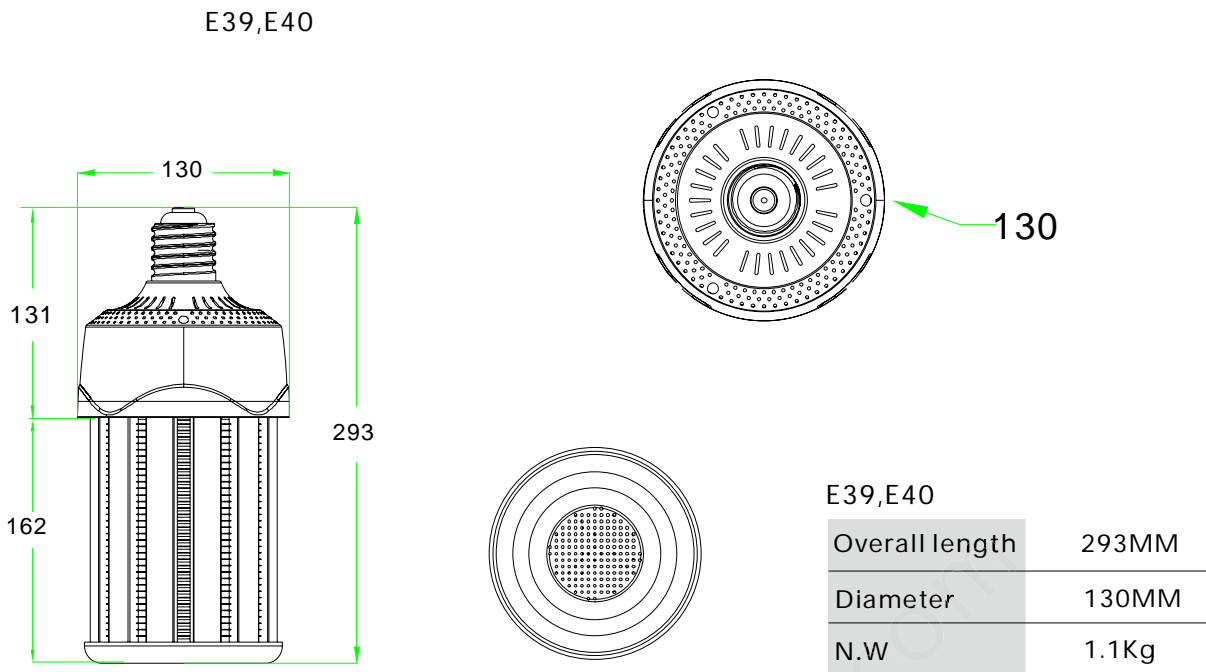

Logistical Data

Package

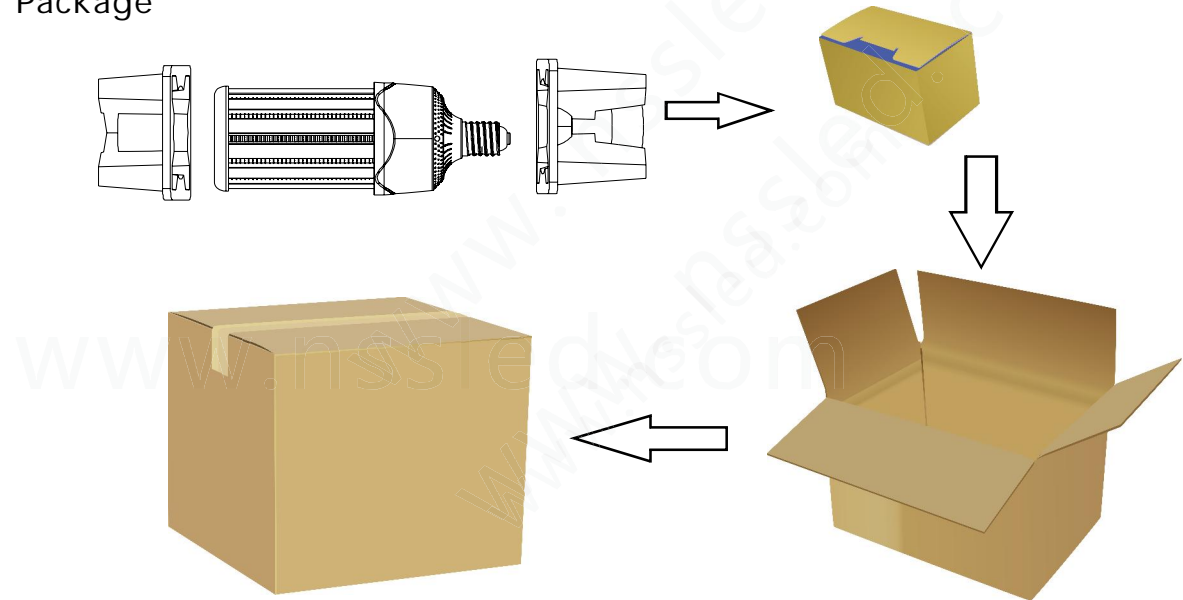


Packaging unit (Pieces/Unit)	Dimensions	Gross weight	Volume
pearl cotton 1	34*15.5*15.5cm	1.3Kg	0.008m ³
Shipping carton box 12	66.5*36*49cm	17Kg	0.12m ³


Product datasheet

Installation


Replace CFL

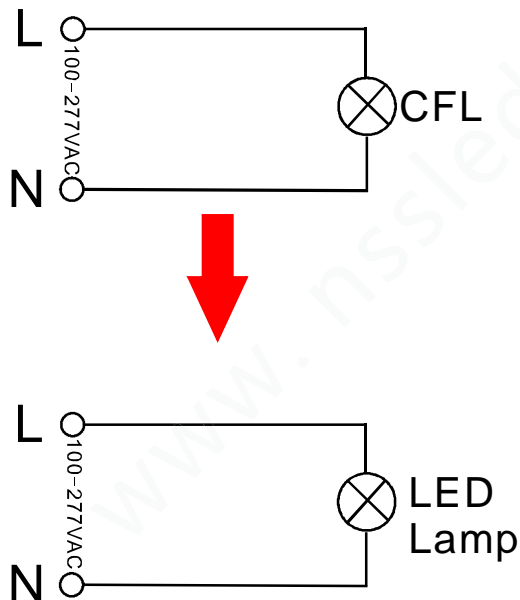

Replace HPS

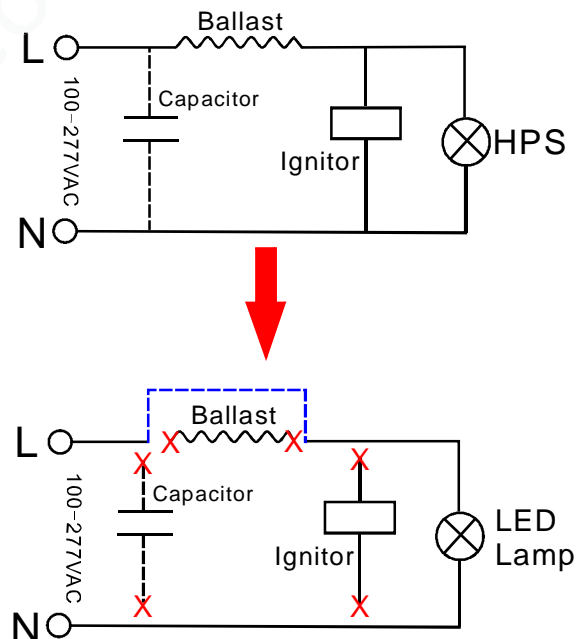


Light Distribution diagram

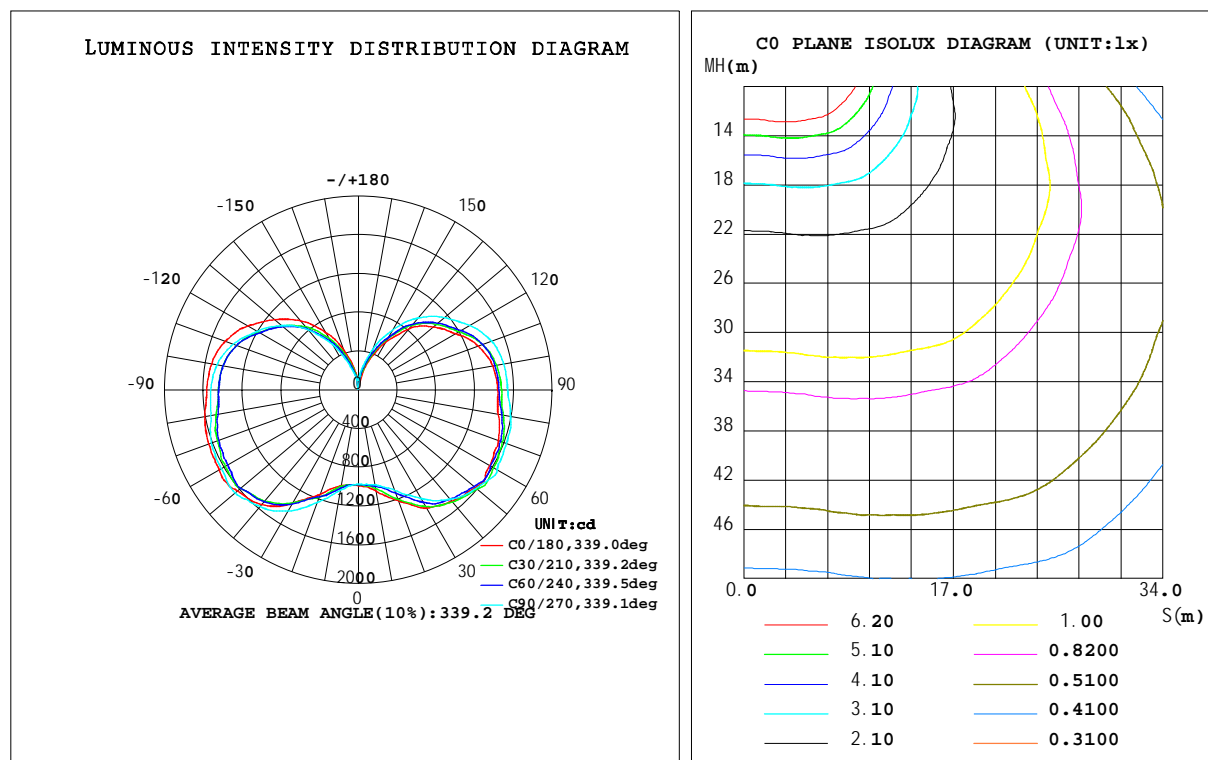

Product datasheet

Attention①

When the products are used in the outdoor lighting,ensure the space is waterproof and well ventilated.Pay attention to the size of the confined space.Ensure the lamp has enough space for heat dissipation which ensures lumen maintenance and extends its working life. As shown below, for your reference



When 100W warehouse light is used in confined space, the diameter must be more than 70cm.


Attention②

Key Benifits of comparison	LED Energy Saving light 100W	CFL/HID 400W	Incandescent Lamp 1000W
Luminous Flux(Lm)	15000	16000	15000
Efficiency(Lm/W)	150	40	15
Better Color Appearance Measured in color Rendering index	80	80	98
Wide Color Availability In CCT(kelvin)	2700-6700	2700-6700	2700
Starting Time,Quick Start (min)	0	3	0
The life of the lamp(H)	35000	8000	5000



LED Energy Saving
light 100W

Replacement



CFL/HID 400W



OR



Incandescent
Lamp 1000W

Additional product data

All technical parameters apply to the entire lamp/Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product,which can vary from the typical value.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

