




ACL30-03-UC



Features description

- 1.360 degree disinfection, no ozone, much safer.
- 2.High-intensity UVC ultraviolet bacteriostasis.
- **3.30** minutes rapid sterilization, safe and efficient.
- 4.Eliminate all kinds of bacterial and odors in large spaces.
- 5.Aluminum material for heat dissipation, longer life.
- 6.Smart remote control, timing control, easy to use.
- 7. Widely used in the high-efficiency disinfection of large-scale indoor places. such as canteens, homes, hospitals, gyms, store stores, etc.

Applications

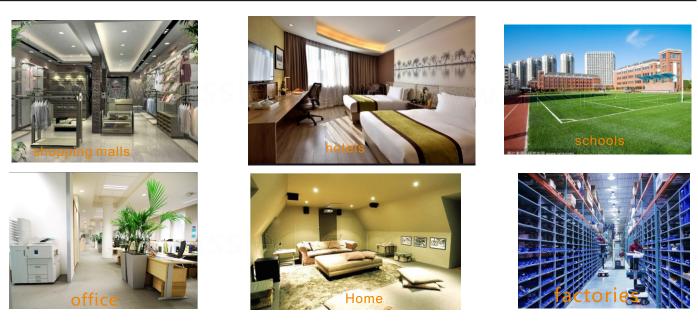

- 15344 Valley Blvd #ACity Of Industry, CA 91746United States
 order@newsunshine.net
- \$\$ +1.201.969.5019/323.616.7060
 \$\$ www.nssled.com





| ectrical data | | |
|-------------------------|---------------------------------------|--|
| Rated wattage | 28-32w | |
| LampInput Voltage | 100-130VAC OR 200-240VAC | |
| Operating frequency | 50/60 Hz | |
| Rated power factory | >0.90 | |
| Power Efficiency | >0.87 | |
| Humidity | < 90% | |
| Ambient temperature | -25~45℃ | |
| Remote control distance | 0-25M | |
| Remote control timing | 15minutes/ 30minutes/ 60minutes | |

Light technical data

| Average life span | 10000hrs | |
|--------------------------|-------------|--|
| Switch frequency | 50000 times | |
| Recommended use of space | 15-30m² | |



Directions for Using




(A 12V battery is required for the remote control)

- 1. After conntecting the power, Press the Power Button on the Remote Controller to turn on/off the lamp;
- 2. If timing is needed, please set it with the Buttons of 15mins / 30mins/ 60mins on the Remote Controller.

Warning

- 1. Please switch off the power during installation!
- 2. Please turn off the bulb before approaching it!
- 3. When it's working, do not expose your eyes and skin under the bulb! People, animals and plants must leave the scene!

Dimensions & weight

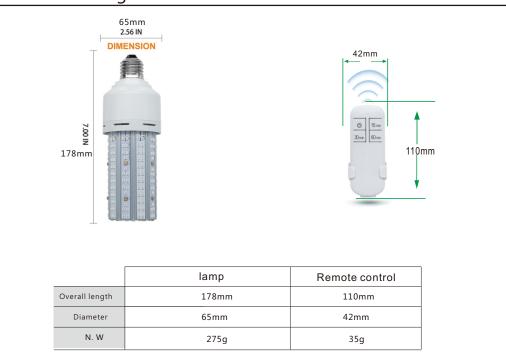






Logistical Data

Package

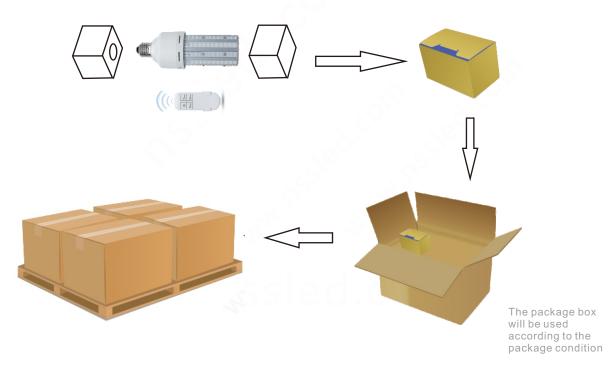

| Model | Packaging unit (Pieces/Unit) | Dimensions | Gross weight | Volume |
|-------------|---------------------------------|----------------|--------------|----------------------|
| ACL30-03-UC | Small box 1 | 20.2*9.2*9.2cm | 380g | 0.0017m ³ |
| | Outer Carton 40 | 51*42*39.5cm | 16Kg | 0.085m ³ |

Additional product data

All technical parameters apply to the entire lamp/Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value.

<u>Disclaimer</u>

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.