




EFL-5GA12-01 EFL-10GA12-01
EFL-5GA22-01 EFL-10GA22-01



1
High density pure aluminum, good hardness, surface treatment, corrosion resistance and rust resistance.



2
PMMA high transparency, anti - rain, anti - moisture, anti - fire, beautiful



3
Intelligent constant current IC, safer and more stable

Features Description

- ◆ 1. Adopts the latest design of short circuit and redundant protection IC linear scheme.
- ◆ 2. Low energy consumption, high efficiency LED green light, economical and applicable.
- ◆ 3. Equipped with PUR tensile and waterproof cable.
- ◆ 4. Voltages can be 110V or 220V (optional) .
- ◆ 5. Strong corrosion resistance, double waterproof, depth up to 50 meters.

Applications

EFFICIENT FISHING
Using new technology chips to release light waves that are very attractive to fish

50m
Depth up to

LARGEMOUTH BASS CRAPPIE SNOOK
STRIPED BASS BIG DRUM
SNAPPER WICKED TUNA PEACOCK BASS


Underwater fish trap
Best choice for night fishing




Technical parameters

SPECIFICATION		EFL-5GA12-01	EFL-5GA22-01	EFL-10GA12-01	EFL-10GA22-01
ELECTRICAL SPECIFICATIONS	Input Voltage (V)	AC110-120V	AC220-240V	AC110-120V	AC220-240V
	Power Factor	0.9		0.9	
	Power Watts(W)	500W		1000W	
	Dimming Availability	NO			
	THD	<20%			
	Efficiency	≥90%			
PHOTOMETRIC INFORMATION	Lumens Delivered (lm)	45000LM±10%		85000LM±10%	
	Color Rendering Index (CRI)	-			
	Wavelength(NM)	520-530NM			
	Light Type	SMD 3030 1W		SMD 3030 2W	
	Beam Angle	360°			
GENERAL PERFORMANCE	LED Amount	864 LEDs			
	IP Grade	IP68			
	Material	6063 aluminum			
	Lamp Size	Φ112*H460mm Φ4.4"*H 37.7"			
	Fixture Weight	2.85Kg(6.3lbs)			
	Storage temperature	-25°C - 55 °C (-13°F to 131°F)			
	Operating Temperature	-25°C - 45 °C (-13°F to 113°F)			
	Environment Humidity	40% ~ 90% RH, non condensing			
Certification	CE,ROHS				
Life Span	>30,000 hours(Luminance decrease is less than 30%)				

Size chart

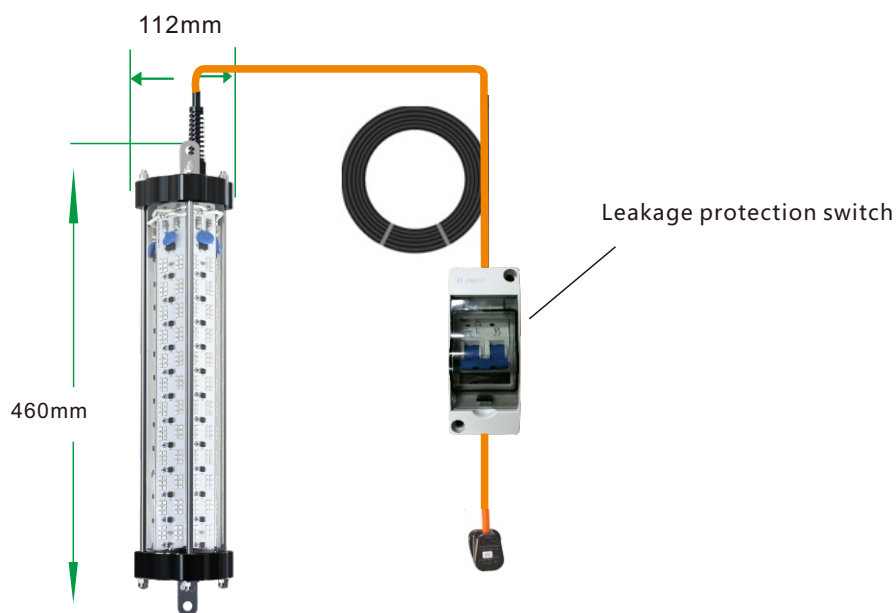

Package

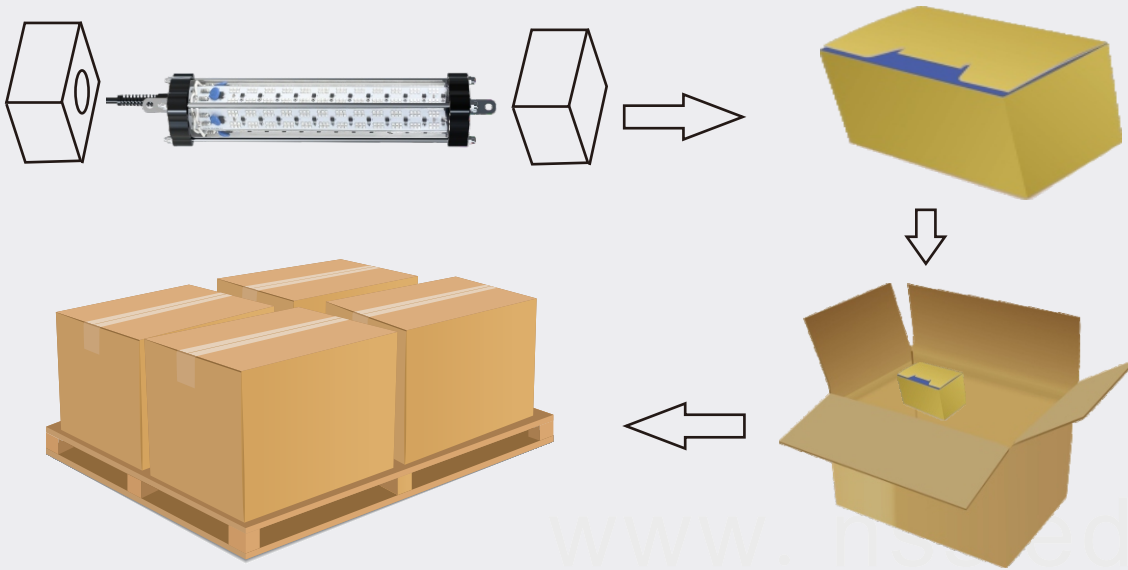

Model	Packaging unit (Pieces/Unit)	Dimensions	Gross weight	Volume
EFL-5GA12-01 EFL-5GA22-01	Small box 1	51.5*15.5*20.5cm	3.2Kg	0.016m ³
EFL-10GA12-01 EFL-10GA22-01	Outer Carton 6	53*47*43cm	21Kg	0.11m ³

Warning:

1. Please use qualified AC power supply
2. The fishing light can only be used underwater, and cannot be lit in the air.
3. Waterproof Product. Handle with care, and do not damage the waterproof sealing ring. Do not use the product if it gets water.

How to use:

1. Place the fishing light in a suitable position underwater, and connect the 120V or 220V AC power supply to light it up.
2. Set up the fishing hook and fishing net area, then the green light will attract the fish coming into the set area.
3. Wait for a period of time, you can efficiently capture the fish.

