

Solar Powered



Portable • Work Lights

15W



Solar
Powered



USB
Charging



Big Capacity
Li-ion Battery



Magnetic
Mounting Bases



IP65
Waterproof



Eco-Energy
Save Money



Wireless
Easy Setup

Portable LED Solar Work Light

Original Designed, Functional, Portable and Wide Applications

PC LENS WITH BEAM ANGLE TYPE II

Optical PC lens, wider lighting area and better lighting efficiency.

MAGNET BASE BRACKET

Magnet base insert on bracket, very convenient to install on metal surface.

Features&Advantages

- ABS+PC lamp shell, anti-UV, anti-corrosion and fireproof
- 104pcs high efficiency LEDs, output lumen 1350Lm
- IP65 waterproof, outdoor applications available
- TYPE II optical PC lens, anti-UV, better lighting efficiency

APPLICATIONS


Temporary work lights, camping, emergency lights,
Truck loading and unloading lighting,
RV outdoor lighting, Repair lighting.

Solar Powered Portable LED Work Light - 15W

SPECIFICATIONS


Model number	XLR-15W
Power	15W
Lumen	1350 Lm
LED Type	SMD 2835 * 104 pcs
CCT	6000K
Beam angle	Type II
Solar Panel	4.5 Wp Mono-crystalline Silicon
Li-ion Battery	18650 / 2600mA / 3.7V*2PCS
Charging time	6-8 Hrs/Day
Working time	Lasts up to 7-8Hrs (100% battery Lighting Mode)
Magnetic brackets	Strong Magnet
Surface Color	Black
Working Temp	-20°C - 50°C
Dimension	240 * 212 * 40 mm
IP Class	IP 65
Lamp Housing	ABS+PC Anti-UV
Warranty	24 months (battery warranty 12 months)

Package DIMENSIONS | WEIGHT

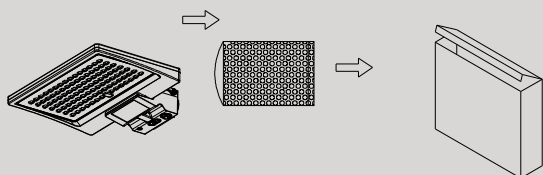

Step 1:
Put the product into a bubble pack,
put 1 * User manual and 2 * rubber boot into color box
with the product together.
Then QC inspection, seal the color box.

Step 2:
Put the packed well color box into
the outer carton
20pcs per carton
Then use seal label seal the carton.







Package	QTY/Pack	Size (mm)				GW(Kg)
		L	W	H	Range	
Color Box	1 pcs/box	247	47	219	±3	0.70
Outer Carton	20pcs/CTN	485	262	458	±5	14.2

DIMENSIONS | WEIGHT


SKU	Length	Width	Heigh	Weight
XLR-15W	240mm	212mm	40mm	550g

Dimensional Drawings

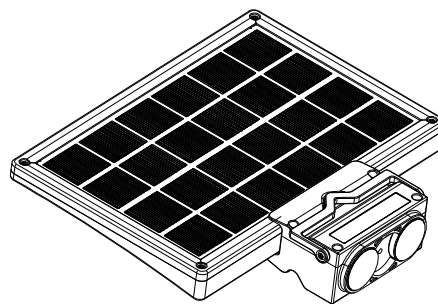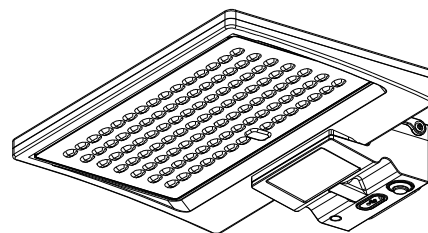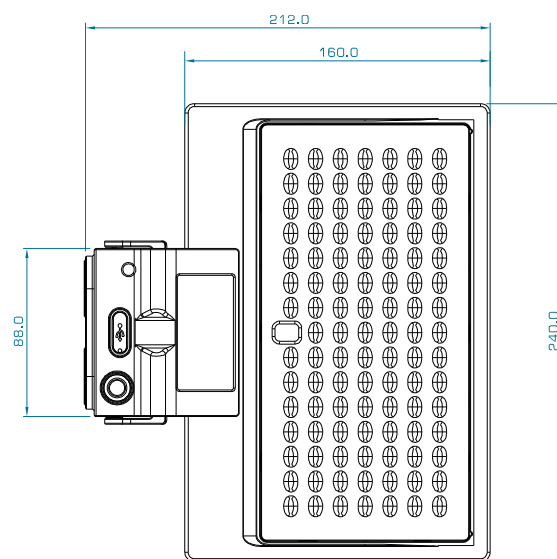

Solar Powered Portable LED Work Light - 15W

WORKING MODES

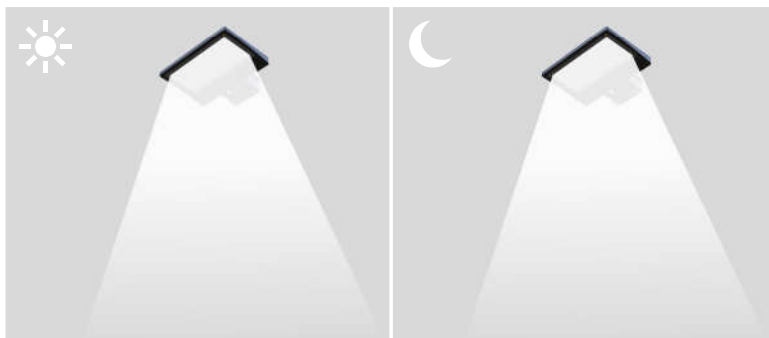

MODE 1



Press Switch Button

LIGHTING MODE:

In the lighting mode, the portable solar work light would be in full brightness 7-8 hours, and will be turned off till battery is run out. There is integrated intelligent control IC, output lumen would be adjusted automatically according to lamp's working time. Press the switch button again to turn off the portable solar work light.

MODE 2




Hold Switch Button 3 Seconds

WARNING LIGHTING MODE:


In the warning lighting mode, the portable solar work light will flicking 3 times in 1 second, then slake for 1 second, and it will cycle over and over like this till press the switch button again to turn it off. This function can make a call attention for some emergency situations

Solar Powered Portable LED Work Light - 15W

LAMP COULD BE CHARGED BY SOLAR

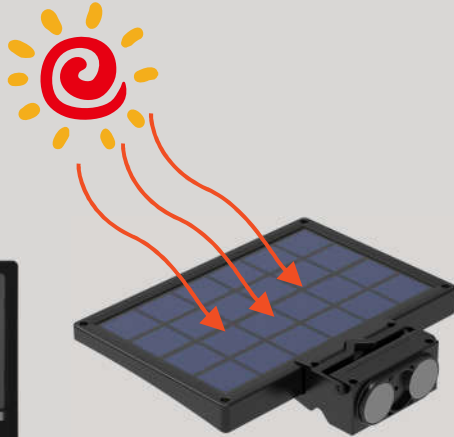

Charging by Solar

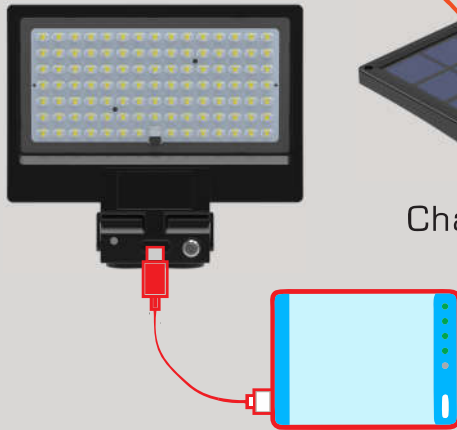

Charging by 5VDC Input

NOTE 1: Charge the solar lights outdoor for 6-8 hours under the sunshine before first using.

INSTALLATION GUIDE

Powerful Magnet Bases Mounting:

Extremely durable strong magnetic magnet base holder can attach on any metal surface it can ensure the portable solar work light ahigh performance for outdoor applications.


Rubber boot on magnet can help to prevent scratching on your car or other surface.

Widely Application:


Indoor and outdoor uses, backyard lighting, garden lighting, off road lighting, back-up light, construction lighting and so on. Also suitable for emergency road repairs, outdoor camping activities etc.




FUNCTION INSTRUCTION

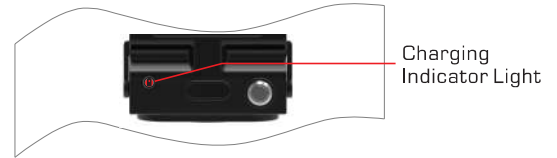

RED : Battery Charging

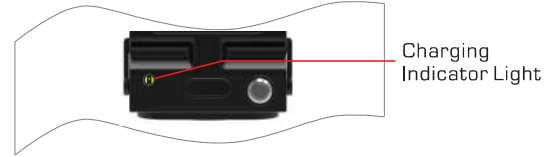

Green : Battery Full

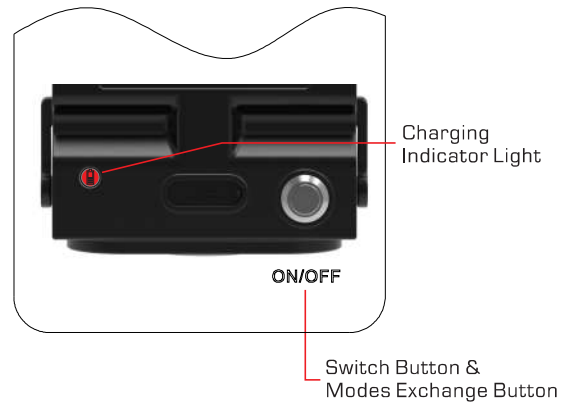

KINDLY NOTE:

The portable Solar Work Light storage and work temperature should not be exceed 50 , to avoid battery damage or even explosion risks, please do not expose lamp to the sun in an enclosed space.

1. Before the first time to use the portable solar work light, please put the lamp under the sunshine to solar charging for 6-8 hours, or you can charge it by Type-C wire for 4-5 hours. When the indicator light on surface changing to green, it means that the battery is full.
2. When you charging the portable solar work light by solar energy, please put the solar panel direct to sunshine, to make sure it can absorb more solar energy.
3. When you pressed the switch button but the portable solar work light not light up or it is flicking, it means that the battery is empty, we need to charge it by solar energy or charge it by 5VDC through Type-C wire.
4. The portable solar work light installed magnet on the bottom and it also support hook installation, so it could be used in many applications. It is IP65 waterproof, it is best for outdoor hiking, camping lighting applications or it could be used as indoor emergency lighting.